


# GIPPSLAND PREMIUM QUARRIES PTY LTD

Phone: 5626 6499  
Fax: 5626 6491

## COARSE WASHED SAND

DATE:	16/01/18	TIME	11.00 AM	SAND TYF COARSE WASHED SAND
SAMPLE FROM:	SALES	MASS SAMPLED:	600 TONNE	

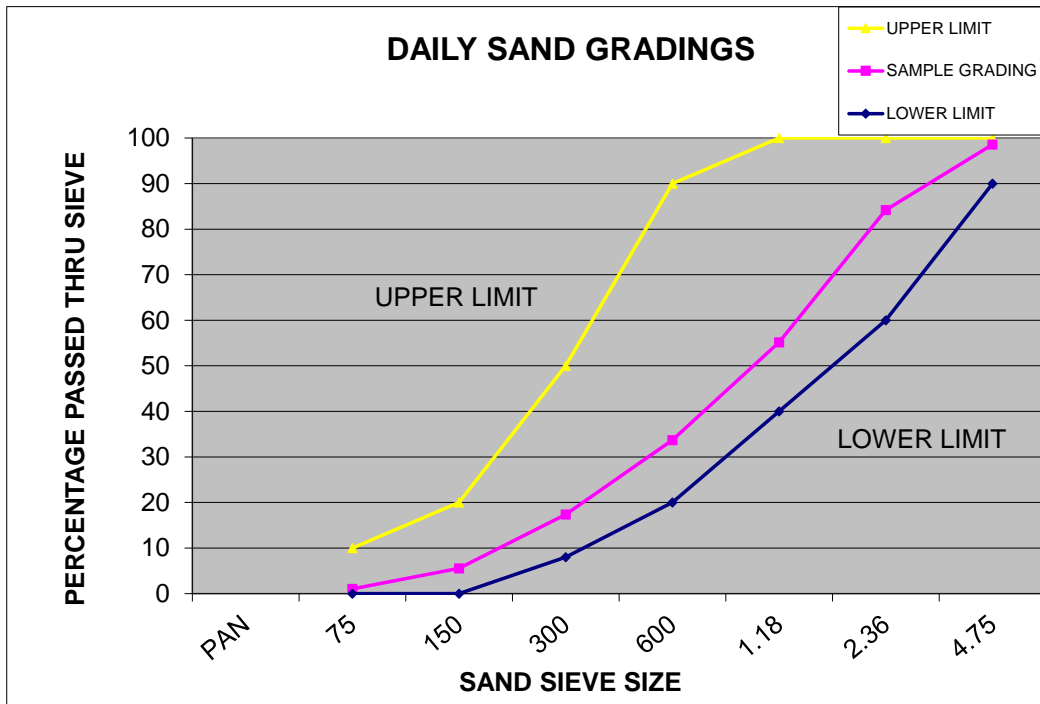

SIEVE	PAN	75	150	300	600	1.18	2.36	4.75
WEIGHT RETAINED	410	405.7	387.2	338.8	271.8	183.8	64.7	5.9
<b>UPPER LIMIT</b>		<b>10</b>	<b>20</b>	<b>50</b>	<b>90</b>	<b>100</b>	<b>100</b>	<b>100</b>
<b>% PASSING</b>		<b>1.04</b>	<b>5.56</b>	<b>17.36</b>	<b>33.70</b>	<b>55.17</b>	<b>84.21</b>	<b>98.58</b>
<b>LOWER LIMIT</b>		<b>0</b>	<b>0</b>	<b>8</b>	<b>20</b>	<b>40</b>	<b>60</b>	<b>90</b>

SAND ANALYSIS APPLICABLE TO THE PRODUCTION OF	COARSE WASHED SAND
WASHED / GRADING	
LAB TECHNICIAN	BARRY DICKESON
ADDITIONAL COMMENTS	

MOISTURE CONTENT (AS 1289.2.1.1)	CLAY FINE SILT (AS 1141.3.3)
WET MASS <u>850</u> DRY MASS <u>818.17</u>	SAND _____ SILT _____
MC=(WM-DM/DM X 100) <u>3.89%</u>	C=(SILT/SAND) X 10( <u>#DIV/0!</u> )
MOISTURE CONTENT = 4% - 6%	SILT CONTENT = 6% - 8%